

ASTORIOS

per aspera ad astra



BLACK FRAME BIFACIAL, DOUBLE GLASS PHOTOVOLTAIC MODULE

ASTR 108HCND/10 Series 430-440 Wp

TOPCON N-TYPE HALF CUT CELLS

440 Wp

MAXIMUM POWER OUTPUT

22.5%

MAXIMUM MODULE EFFICIENCY



NEGLIGIBLE LID IMPACT

TOPCon cells exhibit an almost zero susceptibility to Light Induced Degradation, ensuring sustained high efficiency over time despite exposure to sunlight



HOT SPOTS RISK REDUCTION

Sophisticated electrical design, cells sorting, cutting and soldering technology leads to low hot spot risk and temperature control



HIGH EFFICIENCY

N-type cells technology provides the highest efficiency modern multi busbar configuration at affordable cost



MULTI BUSBAR TECHNOLOGY

Better light absorption and current collection for better power output



MINIMIZING THE SHADING IMPACT

Better partial-shade tolerance due to separated half panel string wiring



PID RESISTANT

Selected encapsulants, precision in manufacturing quality control makes modules highly PID resistant and snail trails free



SAND, AMMONIA AND SALT MIST RESISTANCE


Sand blowing, ammonia and salt mist resistance tests have been passed by international standards to ensure operation in harsh conditions



SUPERIOR SAFETY AND RELIABILITY

Tested to avoid microcracks and welding cracks, can withstand high pressure loads, passed multi-step quality control

PERFORMANCE



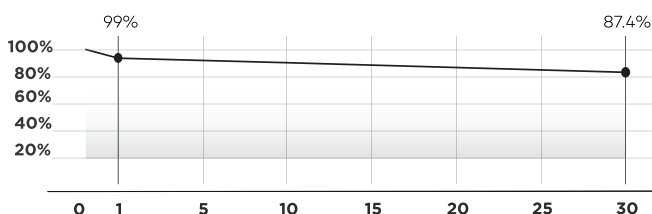


30 YEARS

Performance Guarantee

20 YEARS

Product Warranty

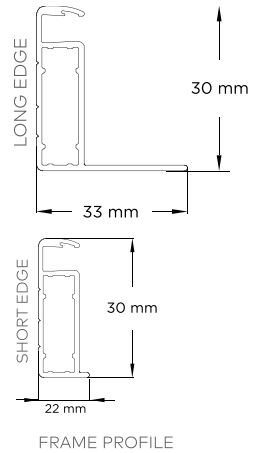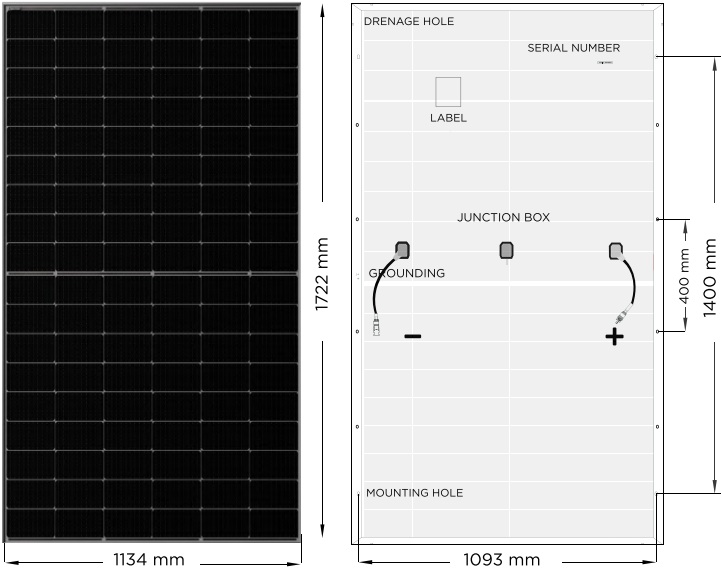

MATERIAL CHARACTERISTICS

Dimensions	1722 x 1134 x 30 mm
Weight	25.8kg
Number of cells	108 pcs (6x18)
Glass front/rear	2mm, High transparency, AR coated
Cell layout	Mono-crystalline, Bifacial 16BB (182 mm)
Frame	Black Color, Anodized aluminum alloy
Junction box	IP68 Rated, 3 bypass diodes
Connector type	Staubli MC4-Evo 2 / MC4 (Original)
Cable	4 mm ² , 300 mm

TEMPERATURE PARAMETERS

Temperature Coefficient of Pmax	-0.30 % / °C
Temperature Coefficient of Voc	-0.25 % / °C
Temperature Coefficient of Isc	+0.046 % / °C
Operating Temperature	- 40°C to + 85°C
Normal Operating Cell Temperature (NOCT)	44±2°C

MAXIMUM RATINGS

Max. System Voltage	1500V DC - (H)
Max. Series Fuse Rating	25A
Uplift load (wind)	2400 Pa*
Downforce (snow)	5400 Pa*

PACKAGING INFORMATION

One pallet quantity	36 pcs
40 ft HC/HQ container	828 pcs

*For more information please refer to Instruction Manual




MODULE TYPE 108HCND/10	430 Wp		435 Wp		440 Wp	
	STC	NMOT	STC	NMOT	STC	NMOT
ELECTRICAL CHARACTERISTICS						
Maximum power (Pmax/Wp)	430	324	435	328	440	332
Open circuit voltage (Voc / V)	38.49	36.56	38.68	36.74	38.87	36.92
Short circuit current (Isc / A)	14.23	11.49	14.31	11.56	14.39	11.63
Maximum power voltage (Vmp / V)	31.88	29.66	32.06	29.81	32.24	29.96
Maximum power current (Imp / A)	13.49	10.93	13.57	11.01	13.65	11.09
Module efficiency at STC (ηm / %)	22.00		22.30		22.50	
Power tolerance (Pmax)			0-+3%			

NMOT: Irradiance 800 W/m², ambient temperature 20°C and wind speed 1 m/s

STC: Irradiance of 1000 W/m² with spectrum AM 1.5 and a module temperature of 25°C

CERTIFICATES

IEC62716 (Ammonia)
IEC60068-2-68 (Sand)
IEC61215 / 61730 / 61701

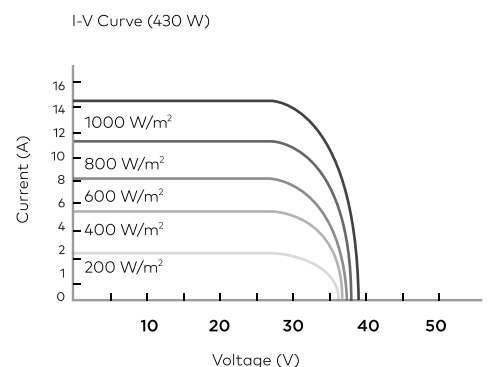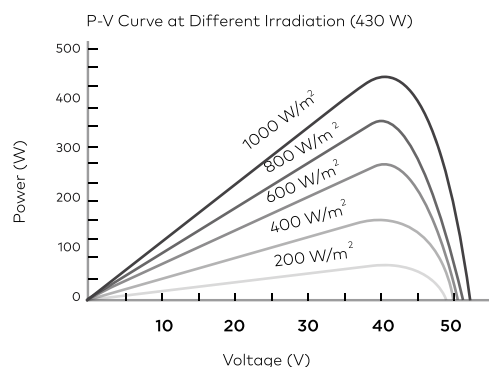

ASTORIOS Holding Inc.
16192 Coastal Highway, Lewes,
Delaware 19958, USA
info@astorios.com