


ASTORIOS

per aspera ad astra

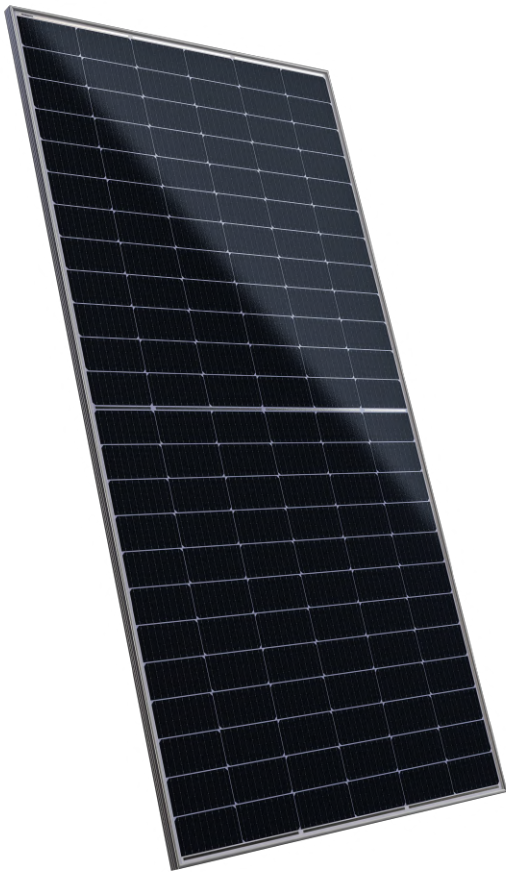

BIFACIAL, DOUBLE GLASS PHOTOVOLTAIC MODULE

ASTR 144HCD/10 Series 545-555 Wp

HALF CUT PERC CELLS

555 Wp

MAXIMUM POWER OUTPUT

21.6%

MAXIMUM MODULE EFFICIENCY



MORE YIELD

PV modules are positive tolerance current level sorted bringing to increase in energy yield and avoiding solar panel degradation due to mismatch



HOT SPOTS RISK REDUCTION

Sophisticated electrical design, cells sorting, cutting and soldering technology leads to low hot spot risk and temperature control



HIGH QUALITY GLASS

Additional yield and easy maintenance are provided by high transparent and self-cleaning glass



MULTI BUSBAR TECHNOLOGY

Better light absorption and current collection for better power output



MINIMIZING THE SHADING IMPACT

Better partial-shade tolerance due to separated half panel string wiring



PID RESISTANT

Selected encapsulants, precision in manufacturing quality control makes modules highly PID resistant and snail trails free



SAND, AMMONIA AND SALT MIST RESISTANCE


Sand blowing, ammonia and salt mist resistance tests have been passed by international standards to ensure operation in harsh conditions



SUPERIOR SAFETY AND RELIABILITY

Tested to avoid microcracks and welding cracks, can withstand high pressure loads, passed multi-step quality control

PERFORMANCE

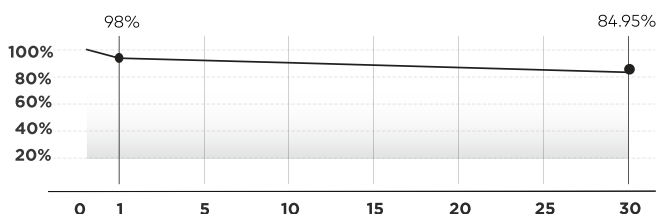

30 YEARS



Performance Guarantee

15 YEARS

Product Warranty

ASTORIOS

per aspera ad astra

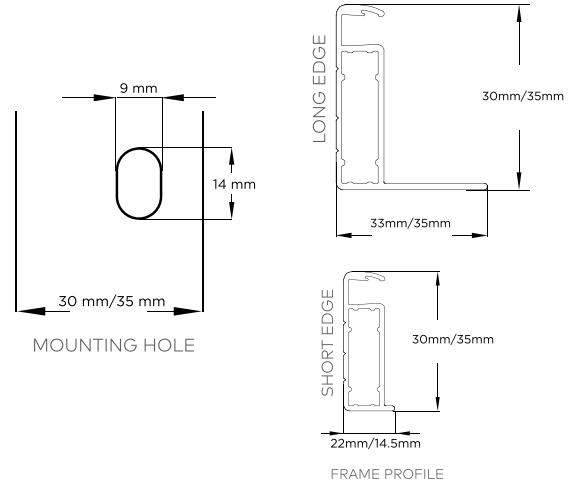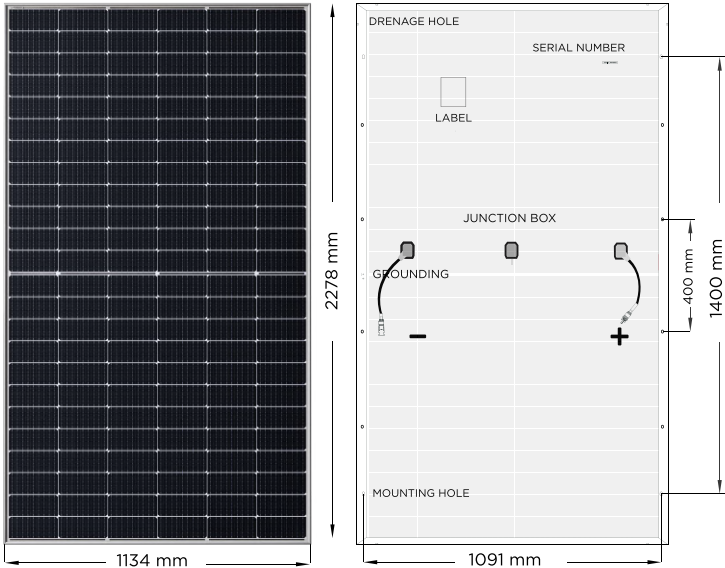

MATERIAL CHARACTERISTICS

Dimensions	2278 x 1134 x 30 mm (35 mm optional)
Weight	32.0kg (32.3kg optional)
Number of cells	144 pcs (6x24)
Glass front/rear	2mm, High transparency, AR coated
Cell layout	Half Cut PERC, Bifacial 9BB / 10BB (182mm)
Frame	Silver color (Black optional), anodized aluminum alloy
Junction box	IP68 Rated, 3 bypass diodes
Connector type	Staubli MC4-Evo 2 / MC4 (Original)
Cable	4 mm ² , 300 mm

TEMPERATURE PARAMETERS

Temperature Coefficient of Pmax	-0.35 % / °C
Temperature Coefficient of Voc	-0.27 % / °C
Temperature Coefficient of Isc	+0.048 % / °C
Operating Temperature	- 40°C to + 85°C
Normal Operating Cell Temperature (NOCT)	44±2°C

PACKAGING INFORMATION

One pallet quantity	36 pcs (31 pcs optional)
40 ft HC/HQ container	720 pcs (620 pcs optional)

MAXIMUM RATINGS

Max. System Voltage	1500V DC - (H)
Max. Series Fuse Rating	25A
Uplift load (wind)	2400 Pa*
Downforce (snow)	5400 Pa*

*For more information please refer to Instruction Manual



MODULE TYPE 144HCD/10	545 Wp		550 Wp		555 Wp	
	STC	NMOT	STC	NMOT	STC	NMOT
Maximum power (Pmax/Wp)	545	406	550	410	555	414
Open circuit voltage (Voc / V)	49.52	46.88	49.62	47.00	49.72	47.12
Short circuit current (Isc / A)	13.94	11.25	14.03	11.32	14.10	11.39
Maximum power voltage (Vmp / V)	40.80	38.32	40.90	38.46	41.00	38.62
Maximum power current (Imp / A)	13.36	10.58	13.45	10.64	13.54	10.72
Module efficiency at STC (ηm / %)	21.30		21.50		21.60	
Power tolerance (Pmax)			0~+3%			

NMOT: Irradiance 800 W/m², ambient temperature 20°C and wind speed 1 m/s

STC: Irradiance of 1000 W/m² with spectrum AM 1.5 and a module temperature of 25°C

CERTIFICATES

IEC62716 (Ammonia)
IEC60068-2-68 (Sand)
IEC61215 / 61730 / 61701

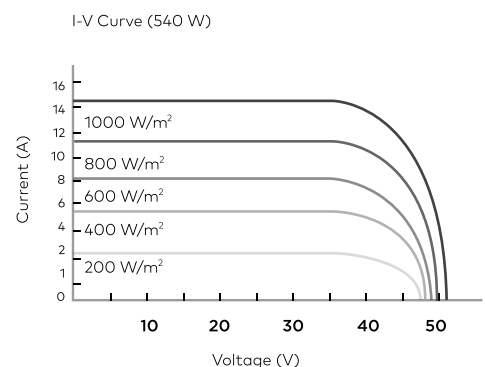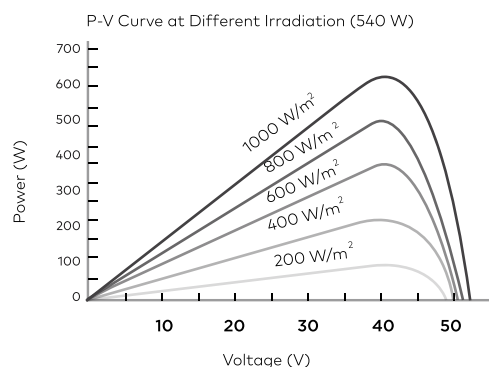

ASTORIOS Holding Inc.
16192 Coastal Highway, Lewes,
Delaware 19958, USA
info@astorios.com

V.2308DSEN
ALL RIGHTS RESERVED
DATA IS SUBJECT TO CHANGE WITHOUT NOTICE