



ASTORIOS

per aspera ad astra

PHOTOVOLTAIC MODULE

HIGH EFFICIENCY
TOPCON N-TYPE BIFACIAL CELLS
BLACK/SILVER FRAME, DOUBLE GLASS

ASTR 120HCND/10 Series **495-505 Wp**

505 Wp
MAXIMUM POWER OUTPUT

22.83%
MAXIMUM MODULE EFFICIENCY



NEGLIGIBLE LID IMPACT

TOPCon cells exhibit an almost zero susceptibility to Light Induced Degradation, ensuring sustained high efficiency over time despite exposure to sunlight



HOT SPOTS RISK REDUCTION

Sophisticated electrical design, cells sorting, cutting and soldering technology leads to low hot spot risk and temperature control



HIGH EFFICIENCY

N-type cells technology provides the highest efficiency modern multi busbar configuration at affordable cost



MULTI BUSBAR TECHNOLOGY

Better light absorption and current collection for better power output



MINIMIZING THE SHADING IMPACT

Better partial-shade tolerance due to separated half panel string wiring



PID RESISTANT

Selected encapsulants, precision in manufacturing quality control makes modules highly PID resistant and snail trails free



SAND, AMMONIA AND SALT MIST RESISTANCE


Sand blowing, ammonia and salt mist resistance tests have been passed by international standards to ensure operation in harsh conditions



SUPERIOR SAFETY AND RELIABILITY

Tested to avoid microcracks and welding cracks, can withstand high pressure loads, passed multi-step quality control

PERFORMANCE


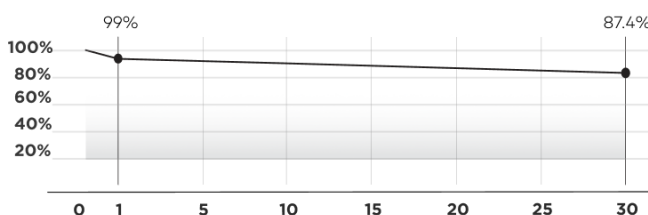


30 YEARS
Performance Guarantee

20 YEARS
Product Warranty

ASTORIOS

per aspera ad astra

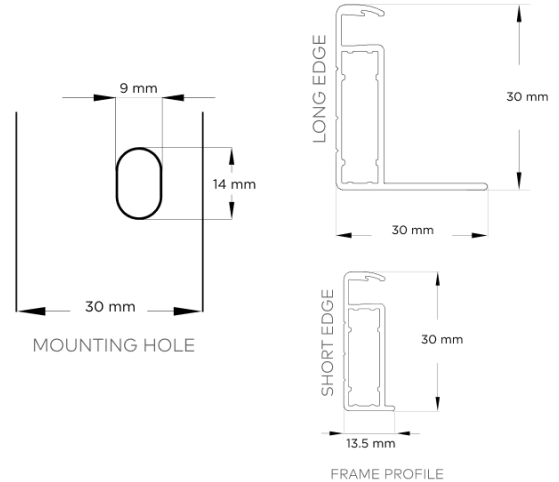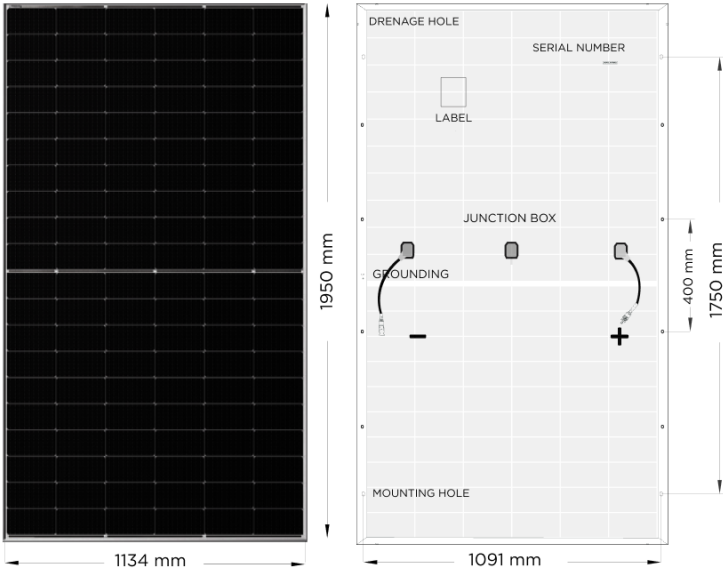

MATERIAL CHARACTERISTICS

Dimensions	1950 x 1134 x 30 mm
Weight	27 kg
Number of cells	120 pcs (6x20)
Glass front/rear	2mm, High transparency, AR coated
Cell layout	Bifacial, Half Cut N-Type (94x182 mm)
Frame	Black/Silver frame, anodized aluminum alloy
Junction box	IP68 Rated, 3 bypass diodes
Connector type	Staubli MC4-Evo 2 / MC4 (Original)
Cable	4 mm ² , 300 mm

TEMPERATURE PARAMETERS

Temperature Coefficient of Pmax	-0.30 % / °C
Temperature Coefficient of Voc	-0.25 % / °C
Temperature Coefficient of Isc	+0.046 % / °C
Operating Temperature	-40°C to +85°C
Normal Operating Cell Temperature (NOCT)	44±2°C

MAXIMUM RATINGS

Max. System Voltage	1500V
Max. Series Fuse Rating	25A
Uplift load (wind)	2400 Pa*
Downforce (snow)	5400 Pa*
Hail Resistance	25mm ice-ball with velocity of 23m/s

*For more information please refer to Instruction Manual



PACKAGING INFORMATION

One pallet quantity	36 Pcs / 1010kg / 1985x1120x1247mm
40 ft HC/HQ container	864 Pcs / 36 Pallets

MODULE TYPE 120HCND/10	495 Wp		500 Wp		505 Wp	
	STC	NMOT	STC	NMOT	STC	NMOT
ELECTRICAL CHARACTERISTICS						
Maximum power (Pmax/Wp)	495	378	500	382	505	385
Open circuit voltage (Voc / V)	44.42	42.30	44.62	42.56	44.82	42.87
Short circuit current (Isc / A)	13.87	11.20	13.93	11.24	13.99	11.29
Maximum power voltage (Vmp / V)	36.97	34.65	37.18	34.86	37.38	34.98
Maximum power current (Imp / A)	13.39	10.91	13.45	10.96	13.51	11.01
Module efficiency at STC (ηm / %)	22.38		22.61		22.83	
Power tolerance (Pmax)			0-+3%			
NMOT: Irradiance 800 W/m ² , ambient temperature 20°C, wind speed 1 m/s / STC: Irradiance of 1000 W/m ² , spectrum AM 1.5, a module temperature of 25°C						
BIFACIAL OUTPUT: BACKSIDE POWER GAIN	10%	20%	10%	20%	10%	20%
Pmax (Wp)	544.5	594	550	600	555.5	606
Module efficiency (%)	24.62	26.86	24.87	27.13	25.12	27.40

CERTIFICATES

IEC62716 (Ammonia)
IEC60068-2-68 (Sand)
IEC61215 / 61730 / 61701

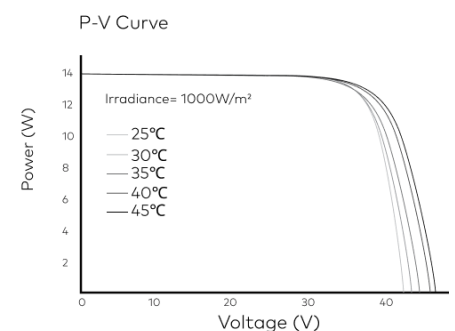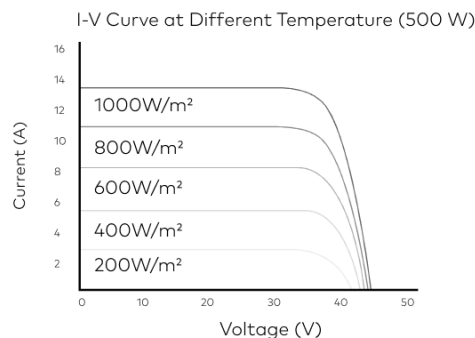

ASTORIOS Holding Inc.
16192 Coastal Highway, Lewes,
Delaware 19958, USA
info@astorios.com